

INSTRUCTION MANUAL

CM-10Wx (Bullet Water- Proof)



CAUTION

RISK OF ELECTRIC SHOCK
DO NOT OPEN



CAUTION : TO REDUCE THE RISK OF ELECTRIC SHOCK,
DO NOT REMOVE COVER (OR BACK)
NOT USE A SERVICEABLE PARTS INSIDE
REFER SERVICING TO QUALIFIED SERVICE PERSONNEL




This symbol is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.




This symbol is intended to alert the user to the presence of important operating and main tenance instructions in the literature accompanying the appliance.

Dimensions

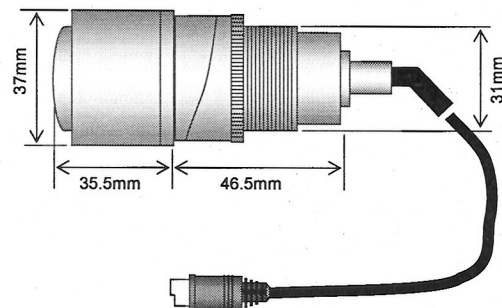

Din Connection



- 1 : Power DC12V
- 2 : NC
- 3 : NC
- 4 : Video Out
- 5 : NC
- 6 : Normal / Mirror
- 7 : GND

Specification



CAUTION : Please Use Regulated Power Supply

IMAGE PICK-UP DEVICE	1/3" IT COLOR CCD Image Sensor
NO. OF PIXELS	NTSC = 510(H) x 492(V) / PAL = 500(H) x 582(V)
TV SYSTEM	NTSC, PAL
SCANNING SYSTEM	2:1 Interlaced
SYNC. SYSTEM	Internal
SCANNING FREQUENCY	NTSC = 15.734KHz/H x 59.94Hz/V PAL = 15.625KHz/H x 50Hz/V
HORIZONTAL RESOLUTION	380 TV Lines
S/N RATIO (AGC off)	More than 50 dB
SHUTTER SPEED	1/60, 1/50-1/100,000 sec.
MIN. SENSITIVITY	0.5 Lux - at F : 2.0 / 30 IRE
GAMMA CORRECTION	0.45 Approx
GAIN CONTROL	Auto. 4dB - 30dB
VIDEO OUTPUT	1.0Vp-p 75 ohm
BURST LEVEL	40 IRE
LENS	Standard f=2.2 (170 deg)
POWER SOURCE	DC 12V 300mA Regulated Power Supply
POWER CONSUMPTION	115mA - at 12VDC
OPERATING TEMP.	-20°C - +50°C
DIMENSIONS / MM	37mm(Dia) x 82.5mm(L)
WEIGHT	175g
CABLE	Din Cable
ACCESSORIES	Extension cable, Mount Ring, Mount spacer