

DECKHAND DIMMER 12A / 24V DC

The illuminated exit setting allows boaters to safely disembark before the lights automatically turn off.

Features

- Digitally controls dimming of non-regulated LEDs, incandescent, and halogen lights
- Illuminated exit with adjustable time delay
- Supports multiple switch locations
- Memory for last dimmer setting
- Bulb saver prevents excessive bulb aging while boat's batteries are being charged
- Offset mounting tabs allow dimmers to be mounted close together
- Includes momentary (ON)-OFF-(ON) switch

Specifications

Nominal Voltage	24V DC
Operating Range	18V to 32V
Maximum Output Current	12A
Maximum Parasitic Current	<2mA
Temperature Range	-40°C to 85°C
Control Type	Pulse With Modulation (PWM)


Regulatory

CE marked, Meets ISO 8846 and SAE J1171 external ignition protection requirements

Using the illuminated exit mode

1 minute delay: Hold the switch in up position (bright) for 2 seconds, lights will flash. Release switch after first flash and the lights will remain on for 1 minute.

2-5 minute delay: Hold the switch in up position (bright) for 1-4 seconds after the first flash. Release the switch after 2 to 5 flashes. The lights will remain on for 1 minute for each flash up to a maximum of 5 minutes.

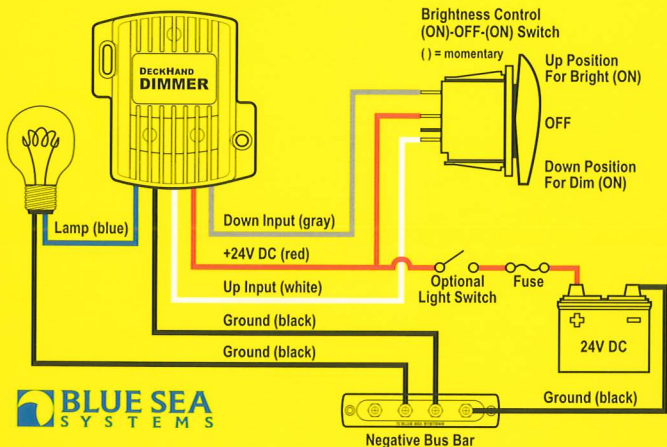

425 Sequoia Drive
Bellingham, WA 98226 USA
p 360.738.8230
p 800.222.7617 USA and Canada
f 360.734.4195
conductor@blueseasystems.com
www.blueseasystems.com

980010680 Rev. 001



6 32085 07509 5