


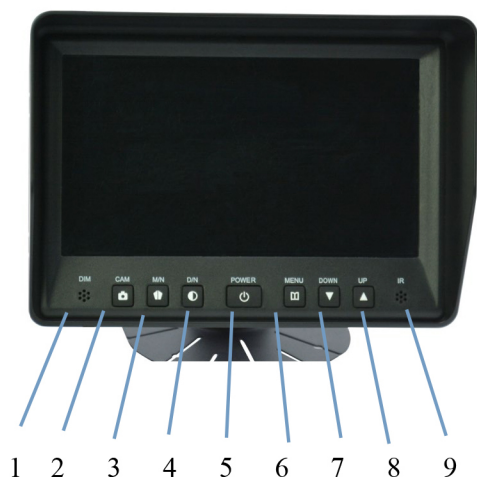


Definition

- | | |
|------------------|--------------|
| 1. DIM | 2. CAM/ENTER |
| 3. MIRROR/NORMAL | 4. DAY/NIGHT |
| 5. POWER | 6. MENU |
| 7. NED | 8. OP |
| 9. IR | |

Note


Monitor husker sidste tilstand før strøm afbrydes, f.eks. hvis monitor har været tændt manuelt før strømmen afbrydes, vil den tænde igen automatisk når strøm bliver tilsluttet.

Tilslutningsdiagram:

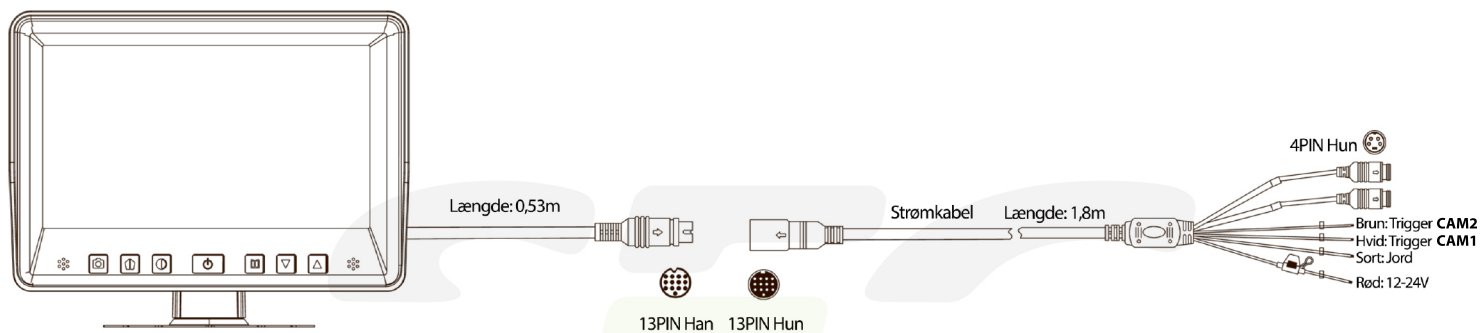

Monitor Specifikationer:

- Skærmstørrelse: 7 tommer TFT-panel
- Billedformat: 16:9 billede
- Indgang: 2-kanals input med 2 triggerkabel
- System: PAL og NTSC automatisk skift
- Opløsning: 1024 x R.G.B x600
- Lysstyrke: 520cd/m2
- Strømforsyning: 12-24V DC
- Ingen højttaler
- Driftstemperatur: -30°C~+70°C.RH95% Maks.
- Opbevaringstemperatur: -40°C~+85°C.RH95% Maks

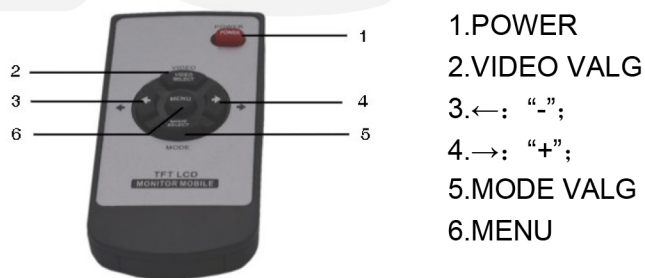

Tilbehør

Beslag	Fjernbetjening CR2032 batteri påkrævet	Strømkabel

Knap-oversigt



Sluk og tænd



OK/enter




Dag/Nat lysstyrke



Skift kameravisning
Spejlvendt/Normal



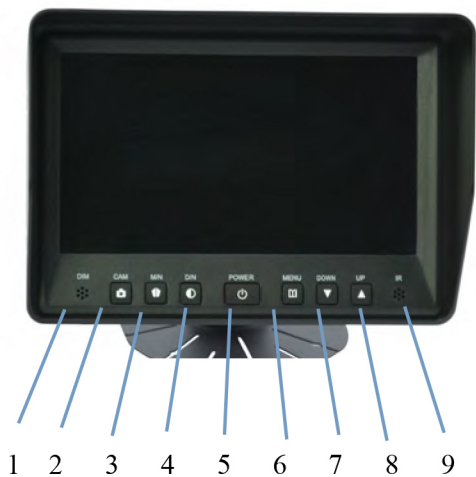

Definition

1. DIM

3. MIRROR/NORMAL

5. POWER

7. DOWN

9. IR
2. CAM/ENTER

4. DAY/NIGHT


6. MENU

8. UP

Note


Monitor remembers last state before power is cut off, e.g. whose monitor has been turned on manually before the power is cut, it will turn on again automatically when power is connected.

Connection Diagram:

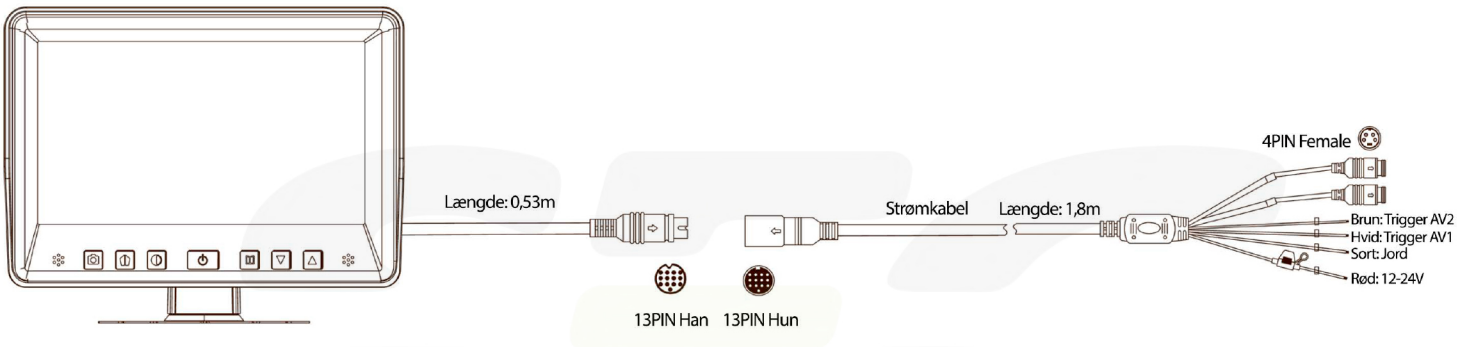

Monitor Specification:

- . Screen size: 7 inch TFT panel
- . Aspect Ratio: 16:9 image
- . Input:2-channelinput with2 trigger cable
- . System: PAL and NTSC auto switching
- . Resolution: 1024 x R.G.B x600
- . Brightness: 520cd/m2
- . Power supply: 12-24V DC
- . No speaker
- . Operation Temperature: -30℃~+70℃.RH95% Max
- . Storage Temperature: -40℃~+85℃.RH95% Max

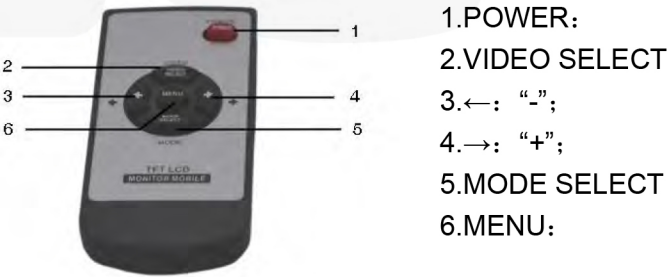

Accessory

Bracket	Remote control CR2032 battery required	Power cable

Button diagram



On/Off



OK/enter



Day/Night brightness



Change camera view
Mirror/Normal



With the menu button, 4 menus can be chosen.
Navigate the menus by using the DOWN and UP buttons

