


IF IVI-DAF-2C(H)

Canbus controlled interface for DAF trucks with IVI Multi Media system



IVI Multi Media system

MXN

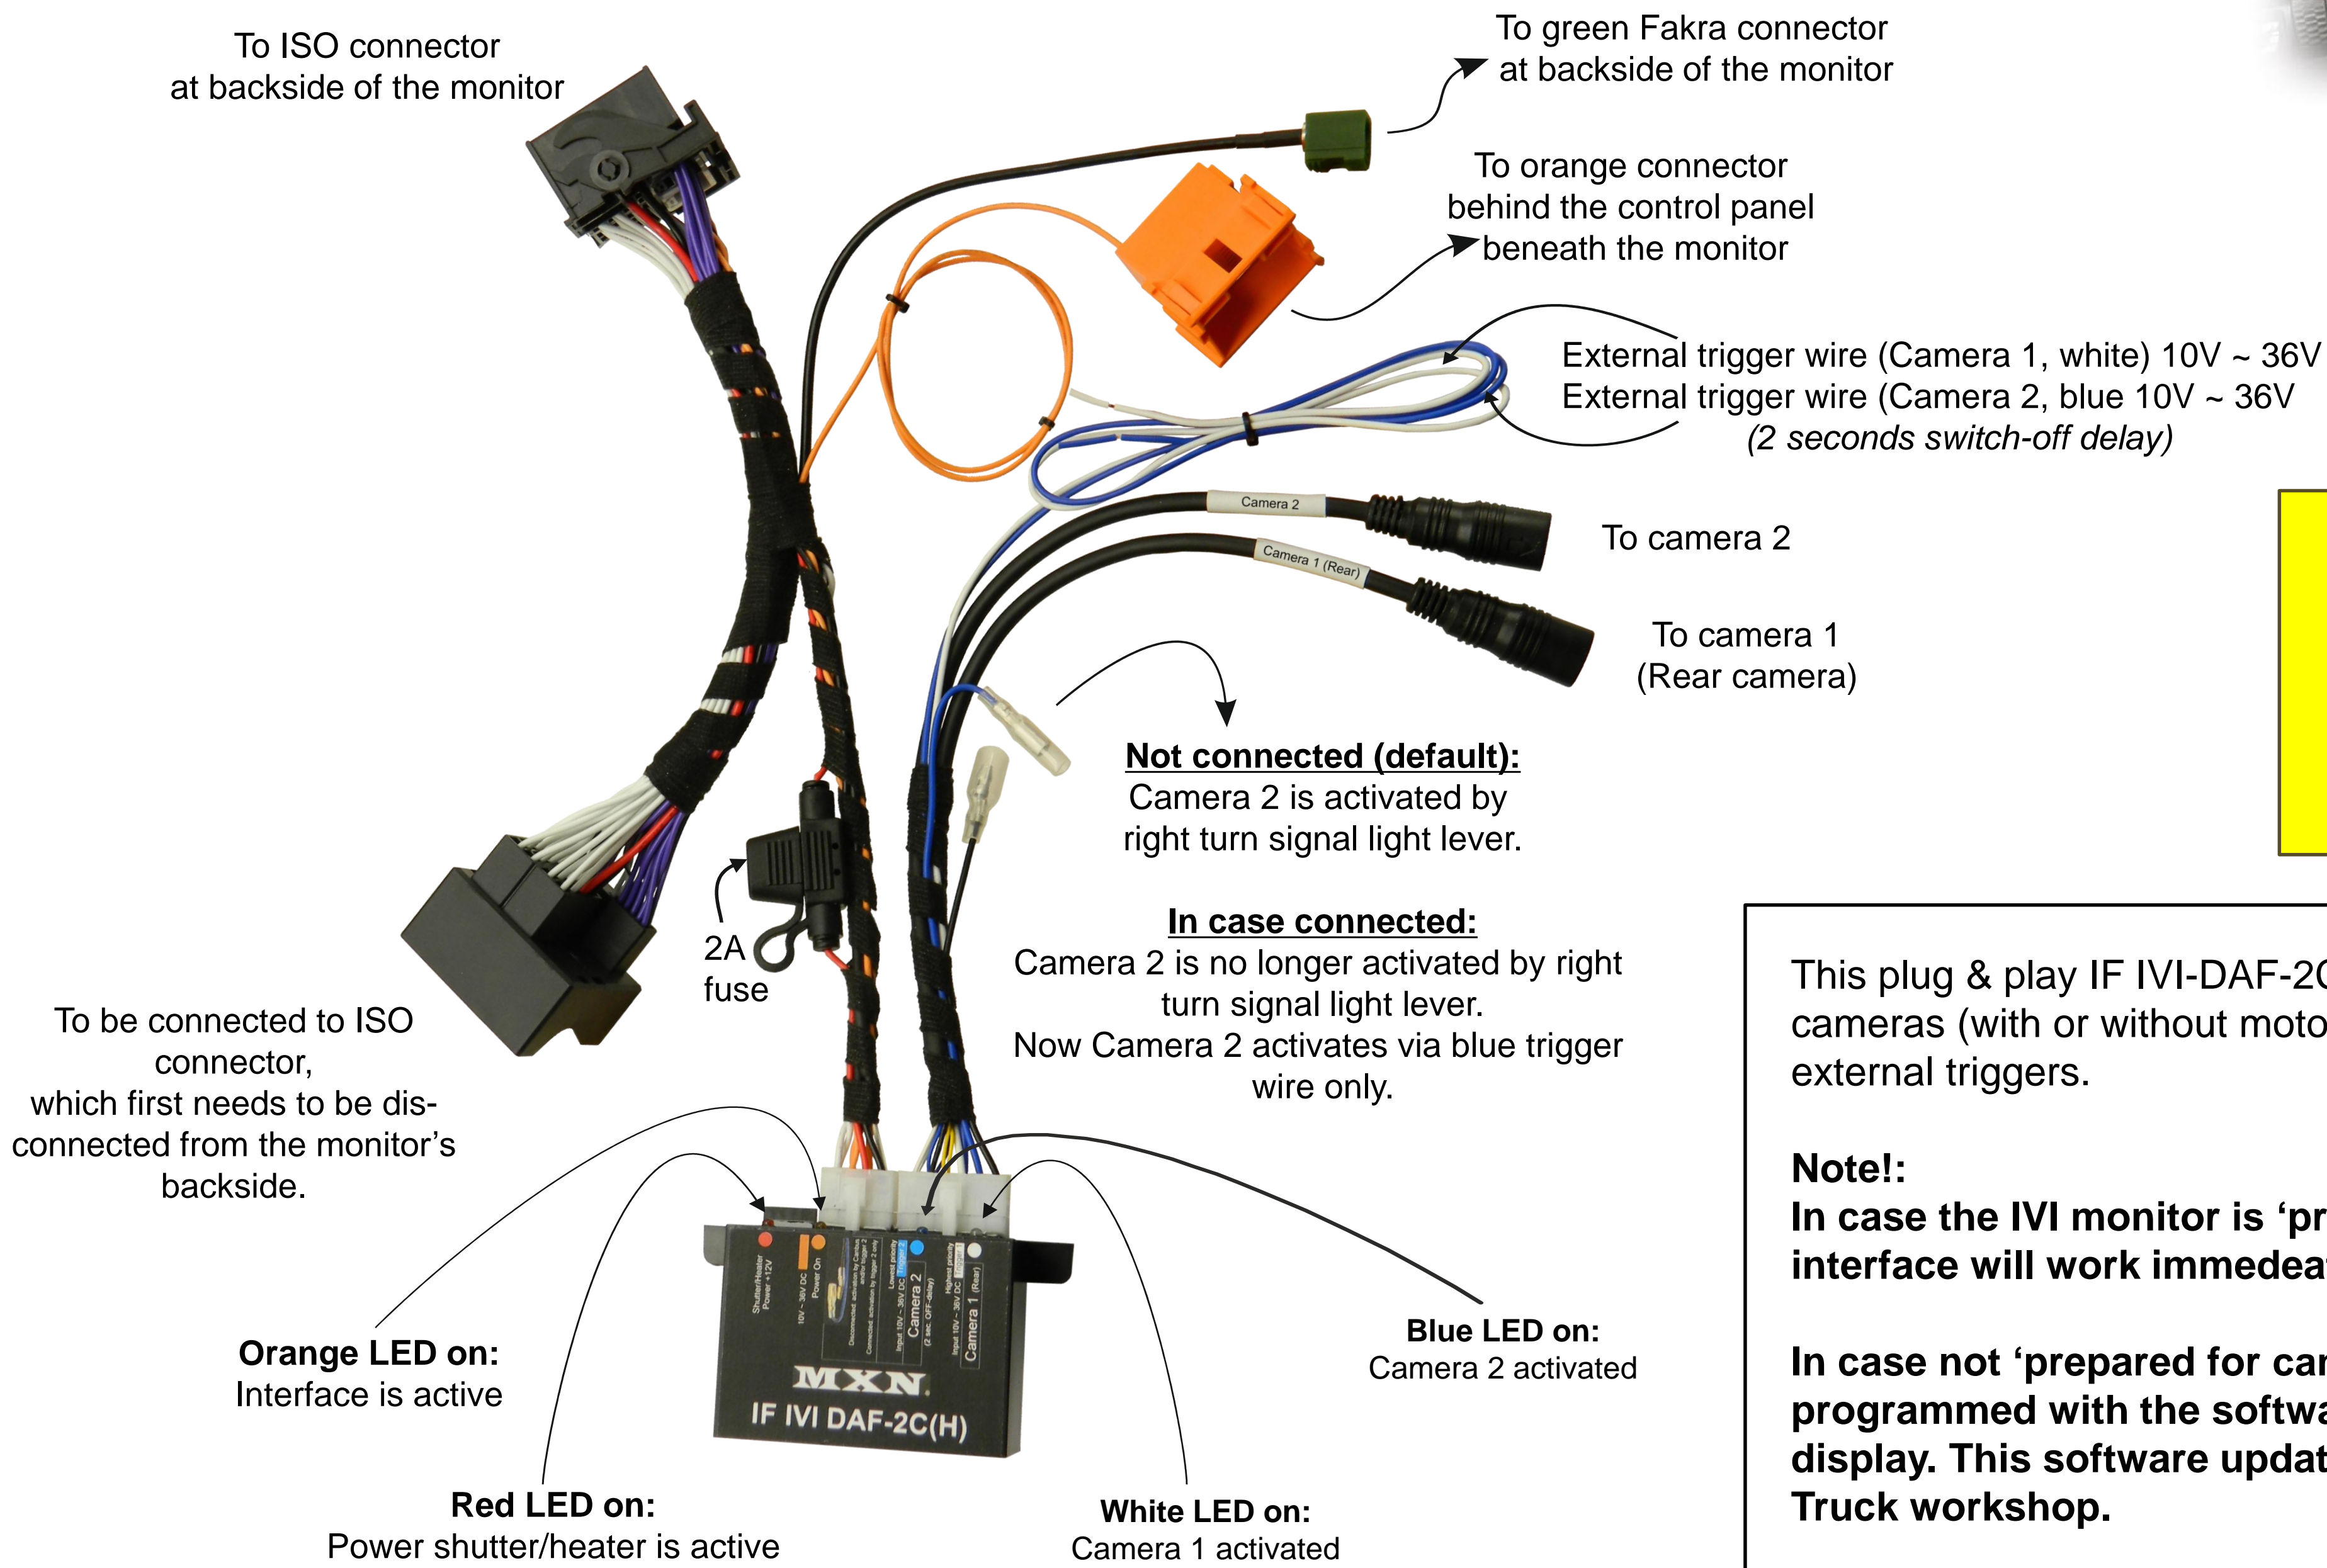

Camera priority during same time triggering of external trigger wires:

Camera 1 (White): Highest priority
Camera 2 (Blue): Lowest priority

External triggers have a higher priority than triggering via Canbus.

This plug & play IF IVI-DAF-2C(H) interface can control two cameras (with or without motorized shutter) via canbus and/or external triggers.

Note!
In case the IVI monitor is 'prepared for camera', then this interface will work immediately after installation.

In case not 'prepared for camera', then the monitor needs to be programmed with the software which enables camera display. This software update needs to be applied at a DAF Truck workshop.

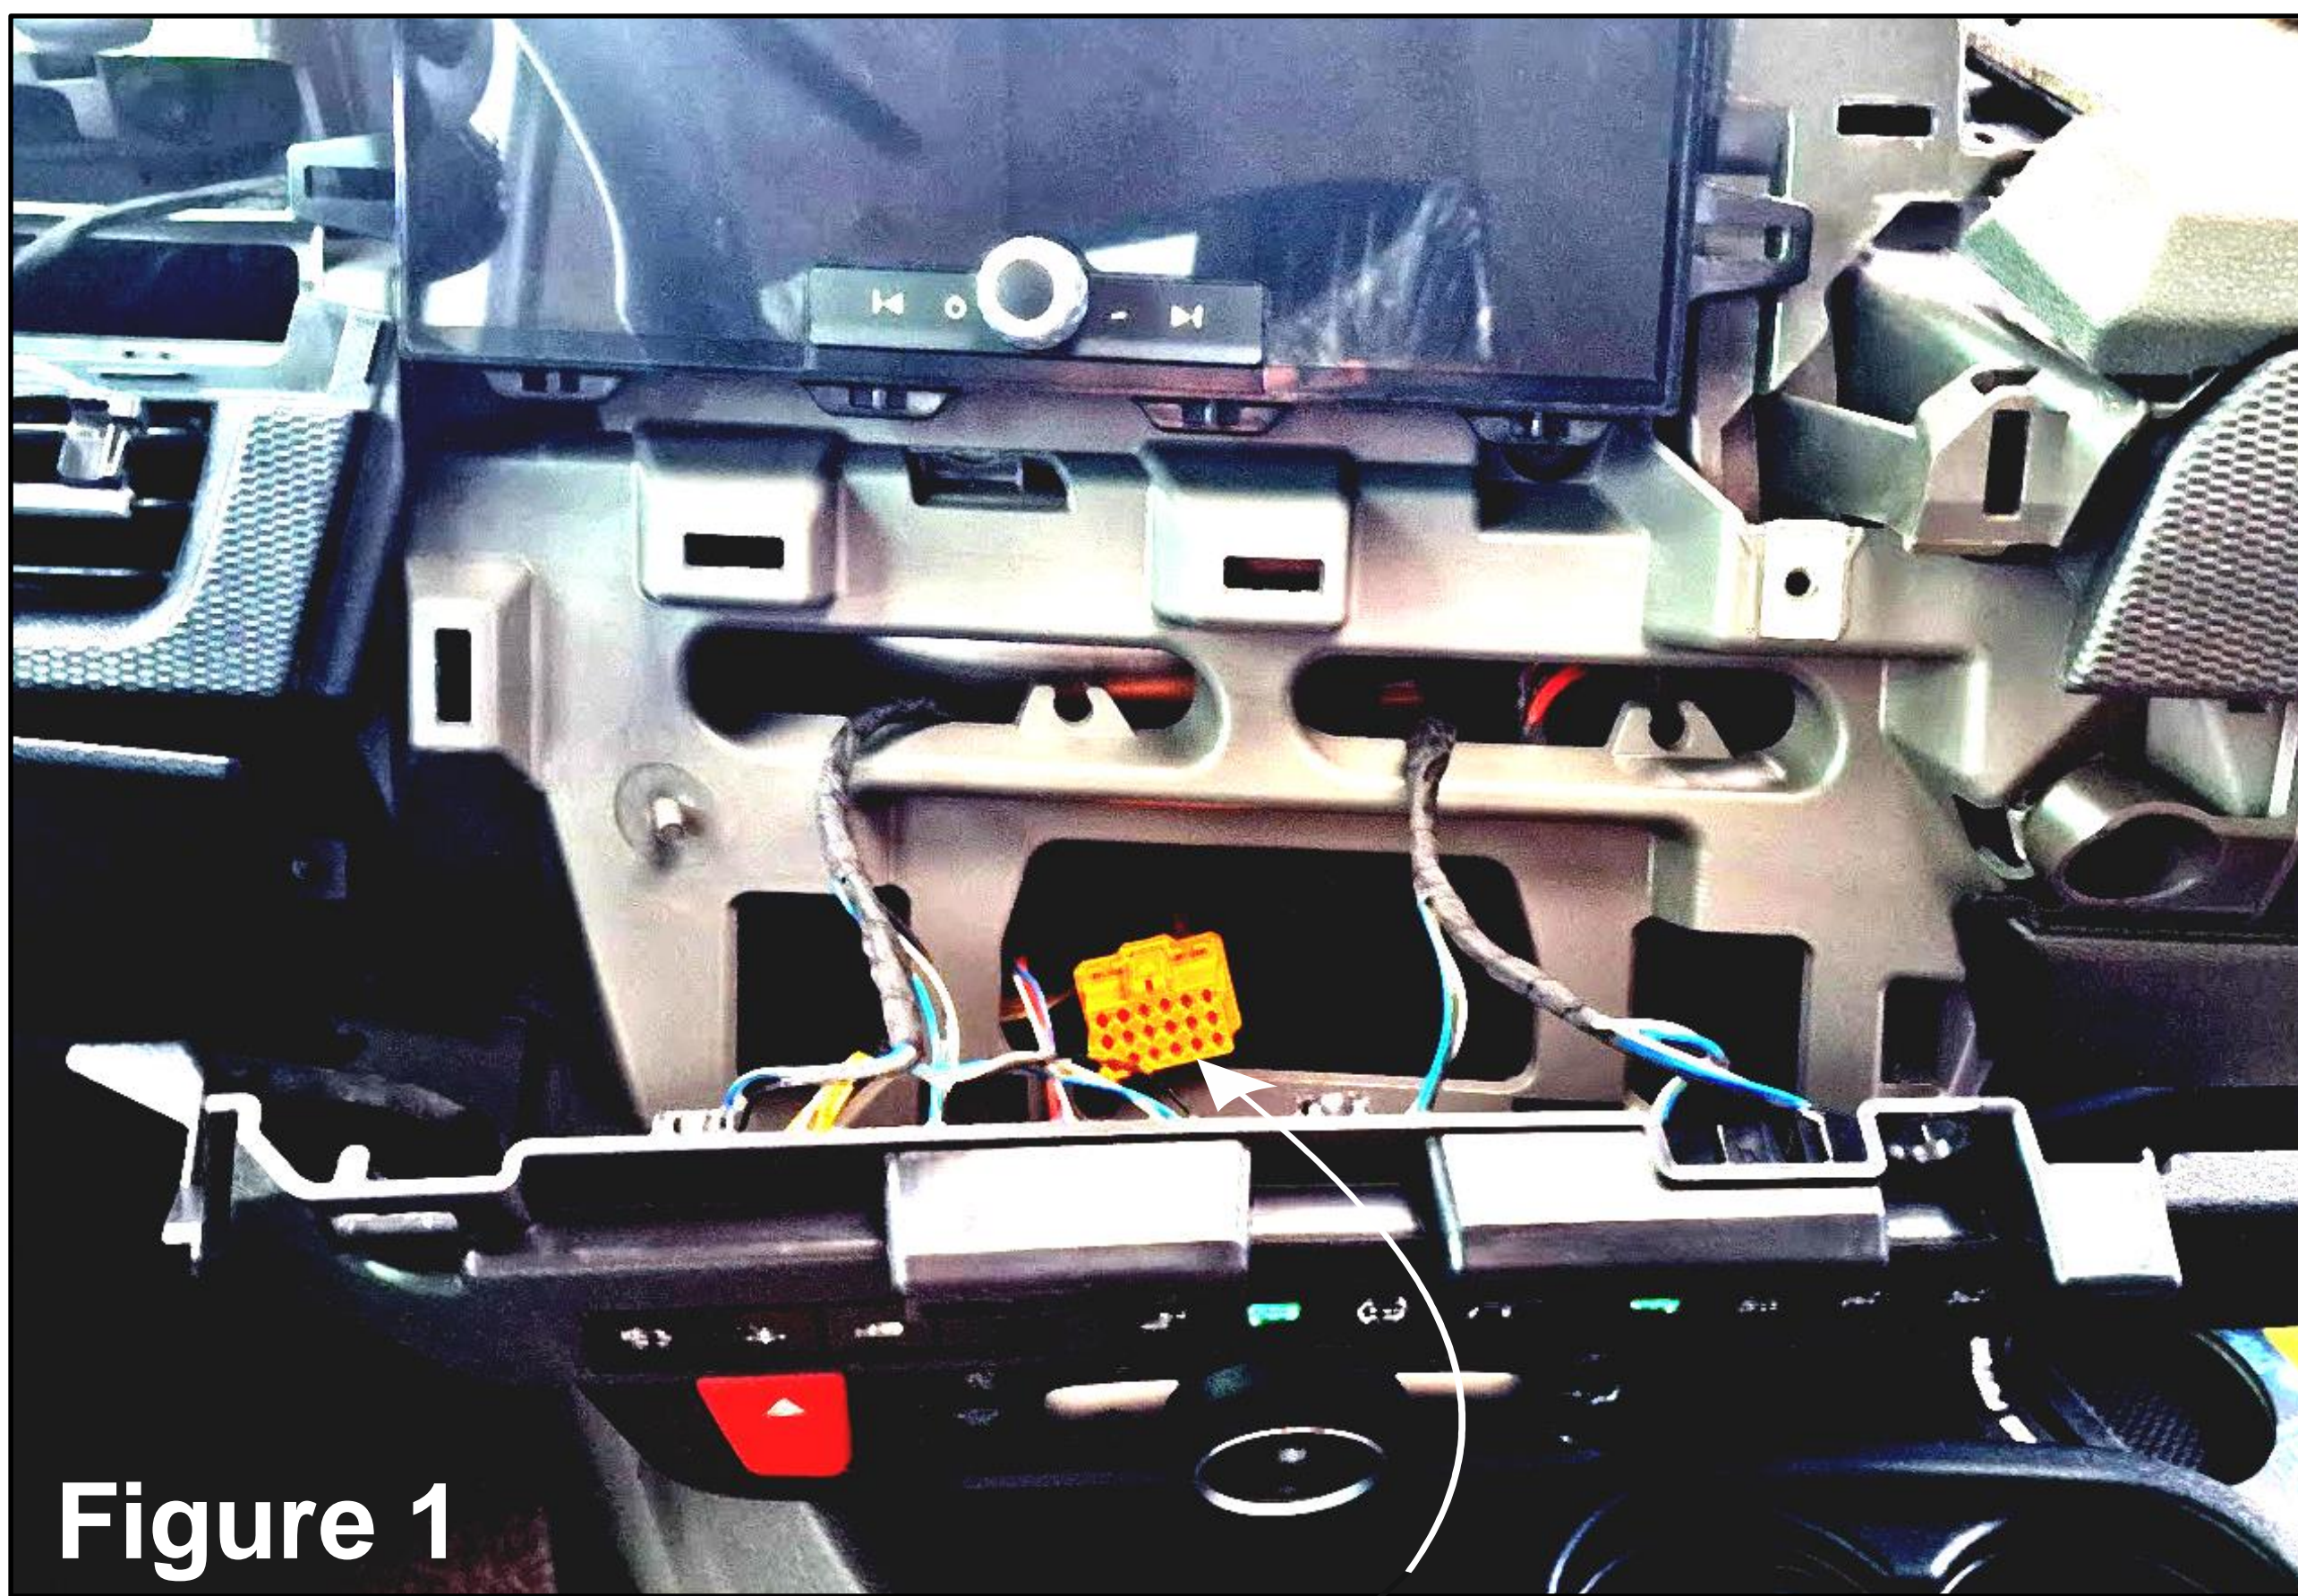


Figure 1

Location orange connector

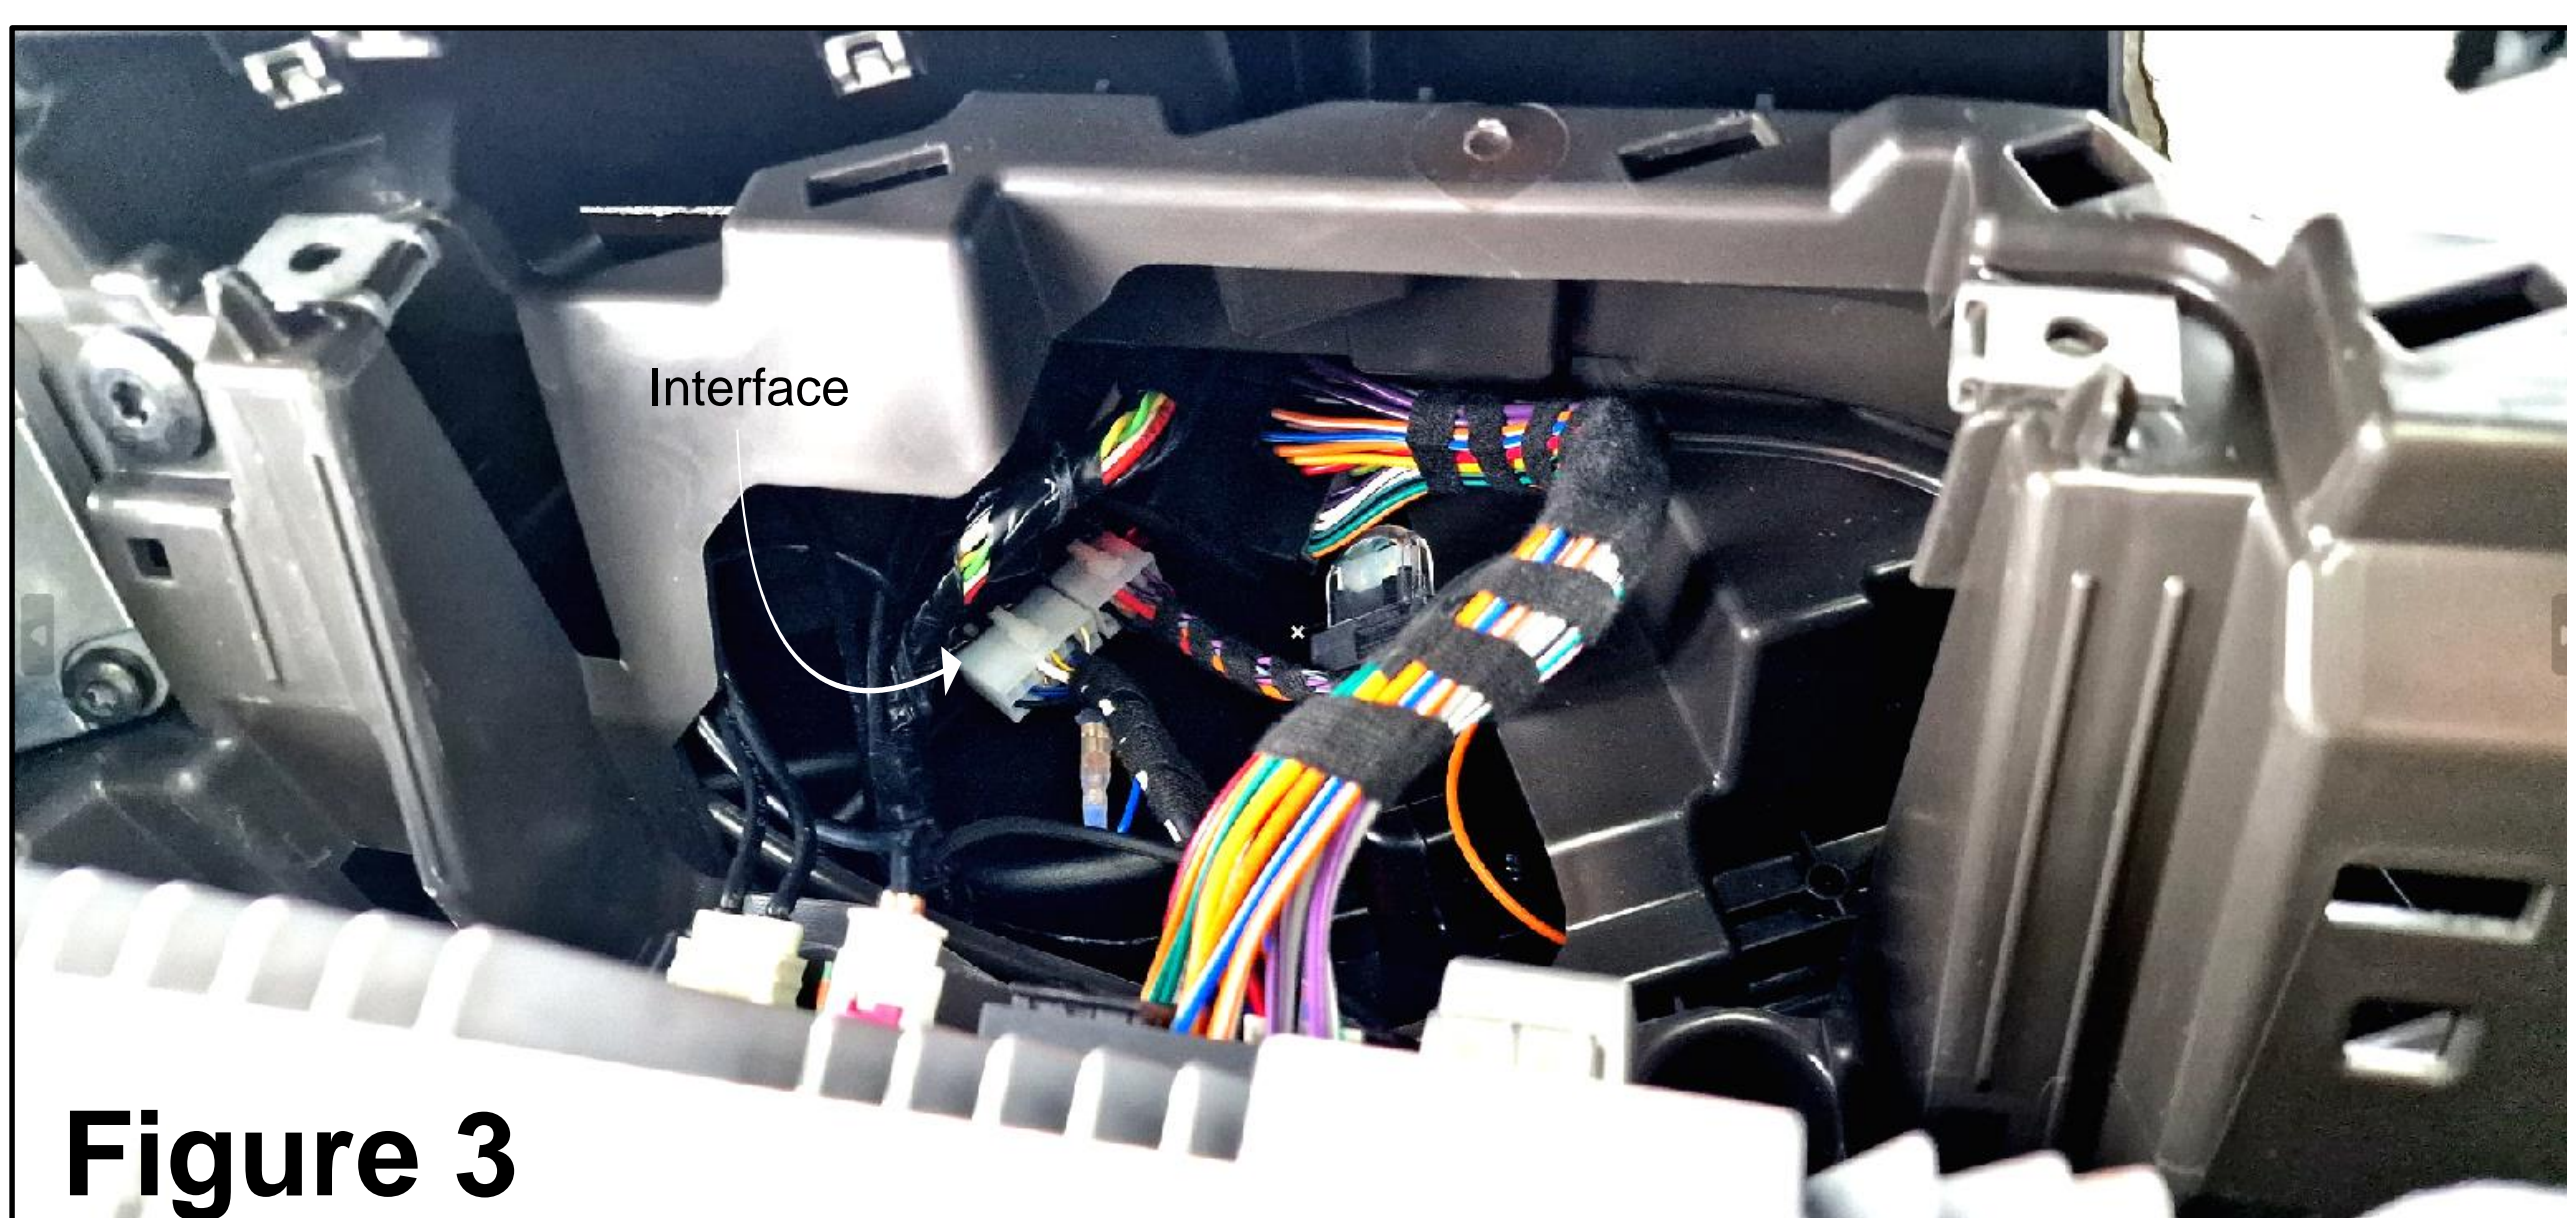


Figure 3

Installation interface + wiring harness.

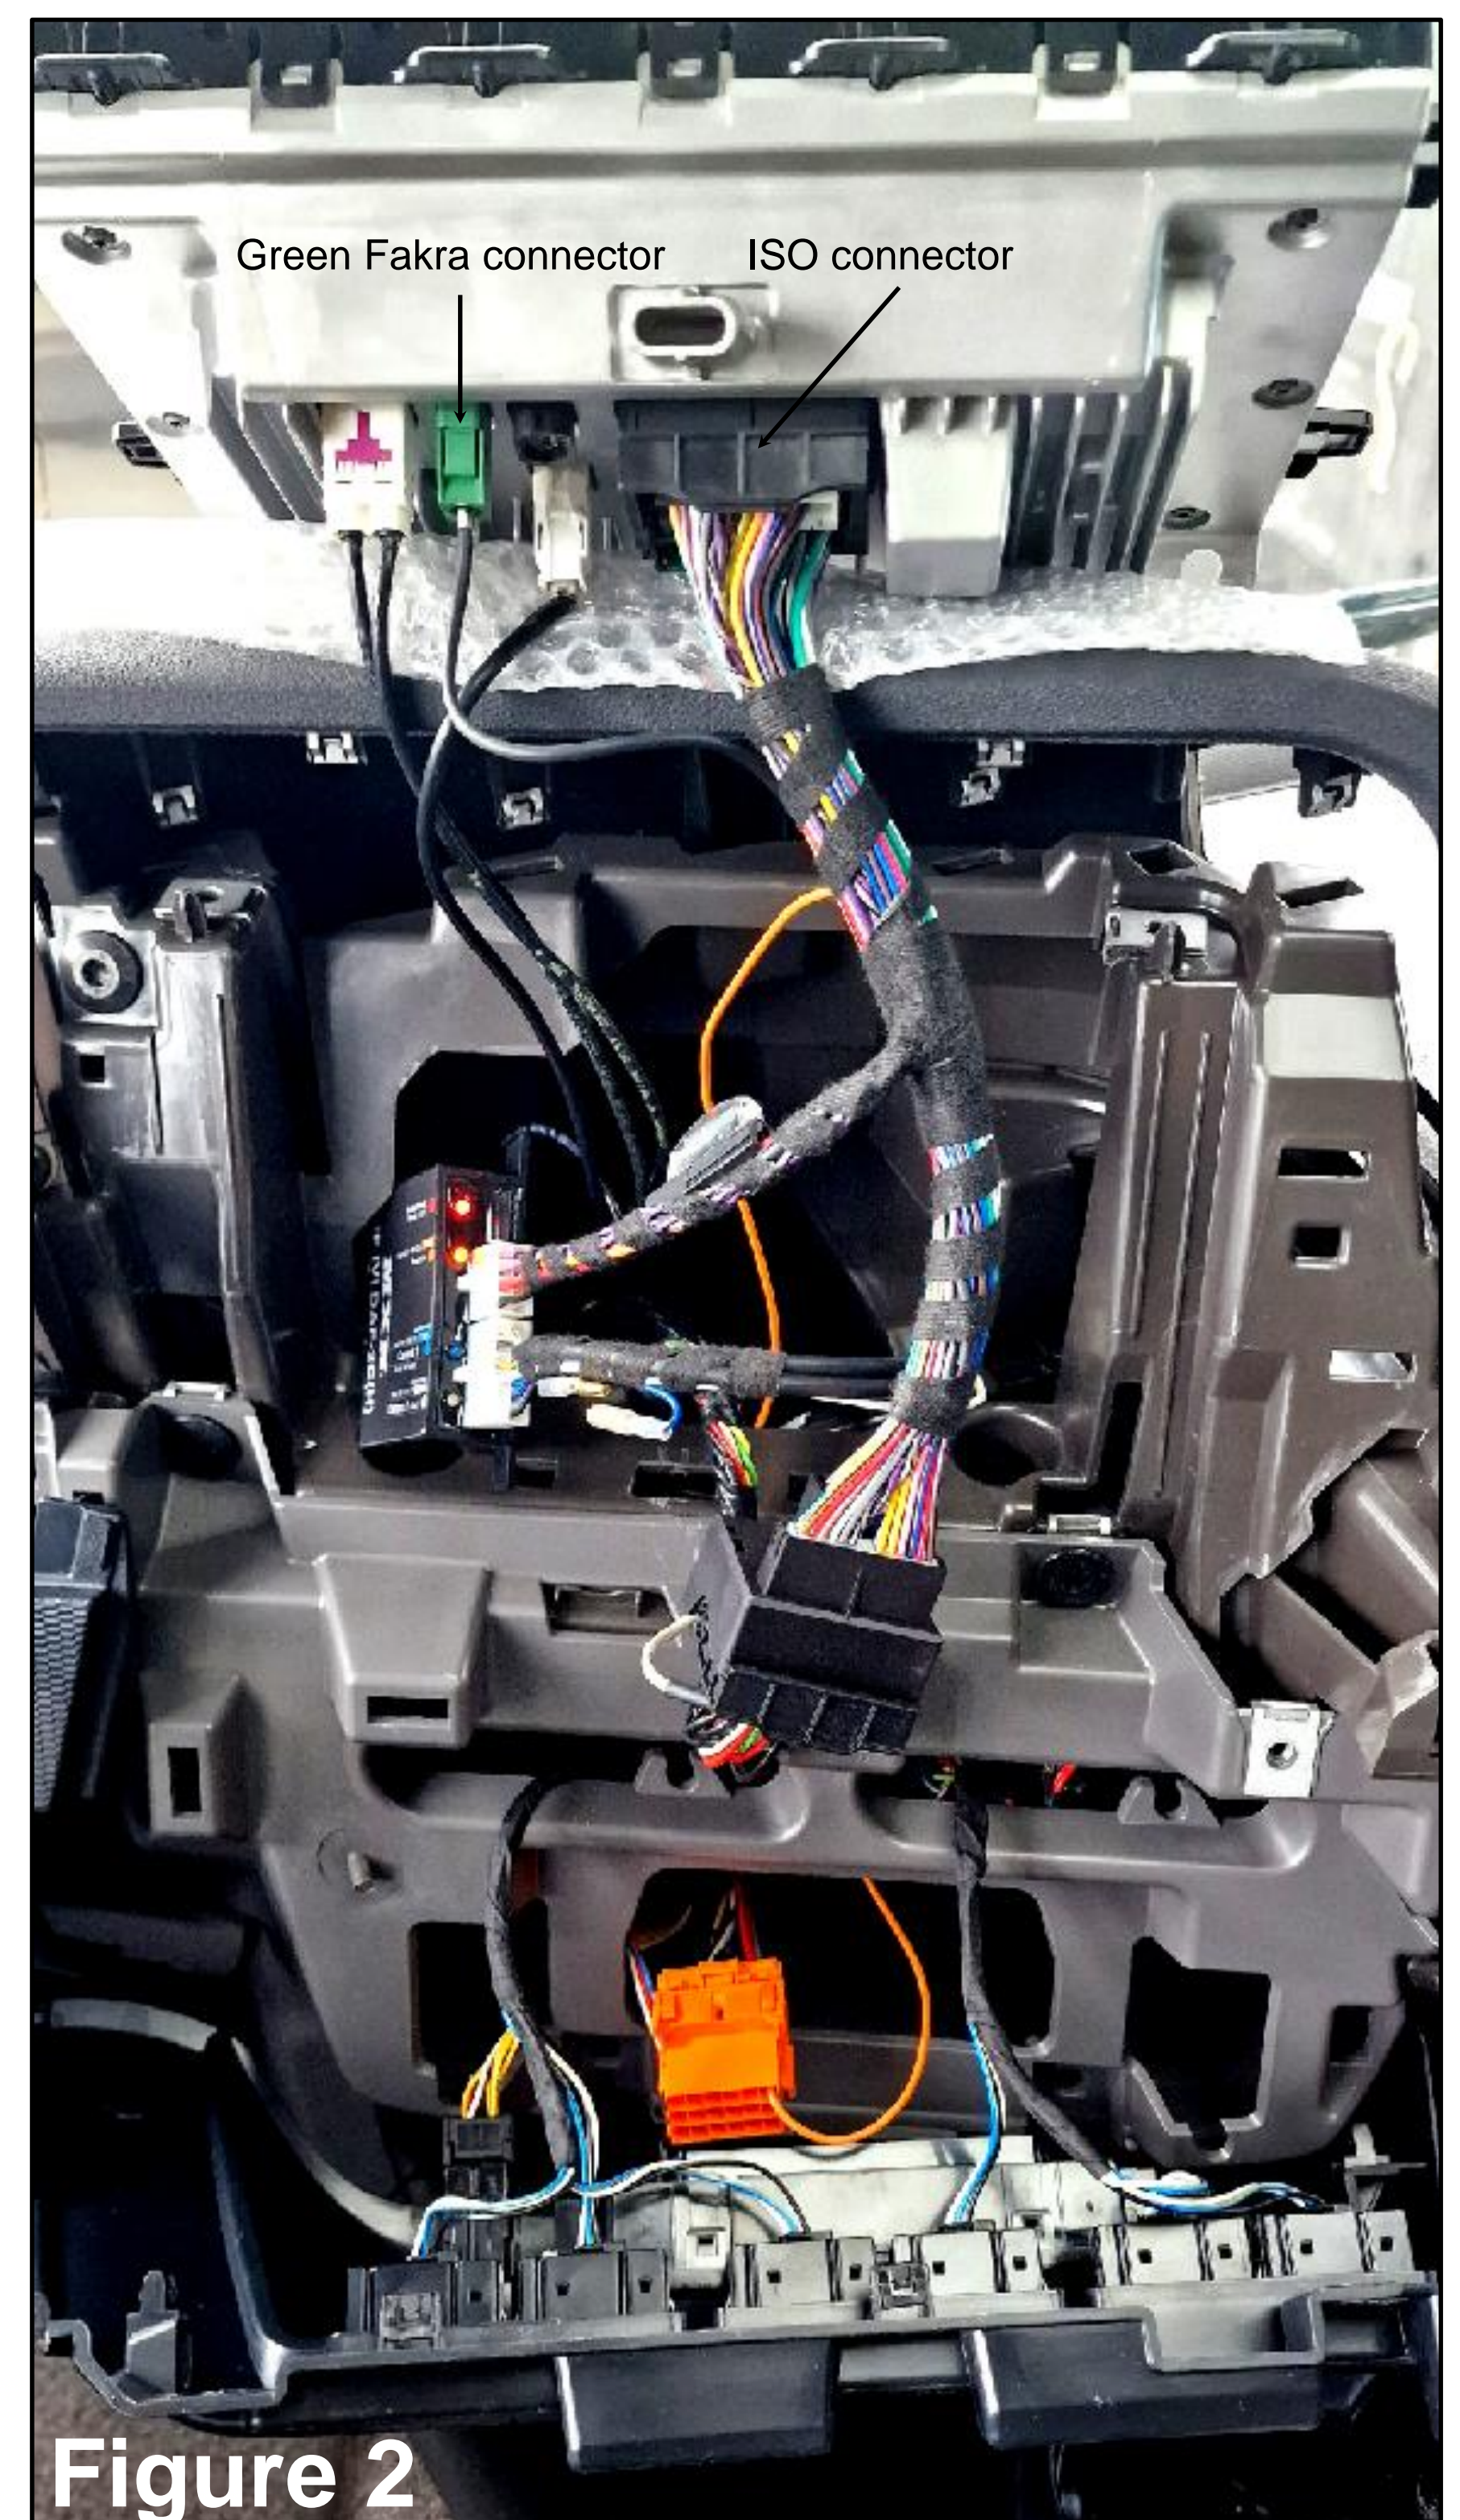


Figure 2

Interface connected to the IVI Multi Media system.